燕泉廣告設計/13827777382

佛山森工建材科技有限公司

Foshan Nanhai Samekom Eco-door CO.,LTD

Add:No.1Yiheng Road,Xizi Industrial Zone Lishui Town Nanhai District,Foshan City,Guangdong China

WWW.SAMEKOM.COM

About SAMEKOM

Foshan Samekom Construction Material Technology Co., Ltd., with its 10 more years abundant experience, has specialized in producing aluminum frame door from the very beginning till now. We have been creating and fabricating hospital doors for years, providing solutions and serving the global area of Hospitals,Meical Centers,Physical Examination Centers,Professional Private Clinics,Laboratory Centres etc. We have managed to be awarded with the certificates such as ISO, SGS, TUV and FSC which are highly recognized by the European Market.

Our product line includes aluminum frame patient room door; Hermetic door;X-ray door(swing or sliding) and slide&swing door for ICU room.We are serving more than 200 hospitals with more 50,000 yearly production and selling products to some high-end hospitals,medical centers Like India,Philippines these years.Also selling to markets such as USA, Australia,Europe ect.We meet excellent architects,designers and doctors every year which drives us more and more experienced as well.

All of our products are made of superior raw materials including high quality aluminium profile for door frames and honey combs, strong and eco-friendly melamine board for door leaves and other excellent quality metals for accessories. So the products manufactured by our company also share high reputation in hospital door's business for its environmental consciousness in the market home and abroad.

Samekom will always stick to the principle of product innovation, customer care and environmental protection and we are looking forward to cooperating with you.

Local&Oversea Cooperation Group

BUDJI ROYAL

ALLIED CARE EXPERTS ACE MEDICAL CENTER CAGAYAN DE ORO
A member of ACE Group of Hospitals

CTC GROUP Moving Forward

GENTRI MEDICAL CENTER AND HOSPITAL, INC. 2011

CMC CALAMBA MEDICAL CENTER THE ONE & ONLY International Standard of Organization 9001-2008 CERTIFIED HOSPITAL IN CALAMBA CITY

EYE 爱尔眼科 AIER OPHTHALMOLOGY

VIJAYA medical centre

美年大健康 Health 100

SURYA Mother & Child Care

THE MEDICAL CITY Where Patients are Partners

ANTONIO V. GUTIERREZ & ASSOCIATES STRUCTURAL CONSULTANT

Factory Landscape

Certificates



samekom
森工铝木生态门

WARD DOOR SPECIFICATION

Door leaf thickness:40mm

Fac ing:Melamine board

Framing:aluminum

Infilling:aluminum tube and aluminum honeycomb

Hardware:high quality hinge and lock set

Glass partition:double tempered glass 5mm,with manual control aluminum blind

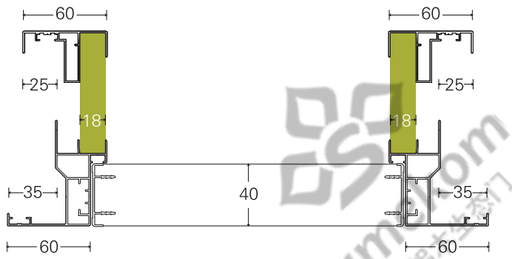

WARD DOOR SPECIFICATION

Door leaf thickness:40mm

Facing:HPL

Framing:aluminum

Infilling:aluminum tube and aluminum honeycomb

Vision panel:5mm tempered glass

Hardware:high quality hinge and lock set

Louver:aluminum

SPECIFICATION

Door leaf thickness:40mm

Facing:HPL

Framing:aluminum

Infilling:aluminum tube and aluminum honeycomb

Vision panel:5mm tempered glass

Hardware:high quality hinge and lock set

Stretcher plate:ss 304

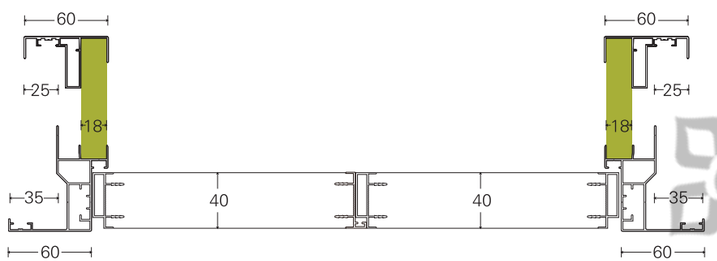

SPECIFICATION

Door leaf thickness:40mm

Facing:Melamine

Framing:aluminum

Infilling:aluminum tube and aluminum honeycomb

Vision panel:5mm tempered glass

Hardware:high quality hinge and lock set GMT Floor hinge (optional)

Kick plate&push plate :ss 304

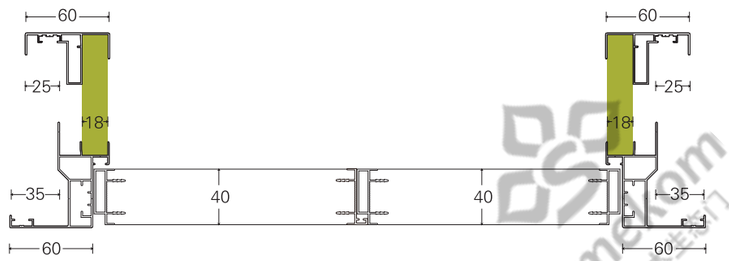

WARD DOOR WITH GLASS PARTITION SPECIFICATION

Door leaf thickness:40mm

Facing:HPL

Framing:aluminum

Infilling:aluminum tube and aluminum honeycomb

Vision panel:5mm tempered glass

Hardware:high quality hinge and lock set

Glass partition:double tempered glass 5mm,with manual control aluminum blind

samekom 森工铝木生态门

SPECIFICATION 规格

Door leaf thickness:40mm

Facing:HPL

Framing:aluminum

Infilling:aluminum tube and aluminum honeycomb

Vision panel:5mm tempered glass

Hardware:high quality hinge and lock set

Glass partition:double tempered glass 5mm,with manual control aluminum blind

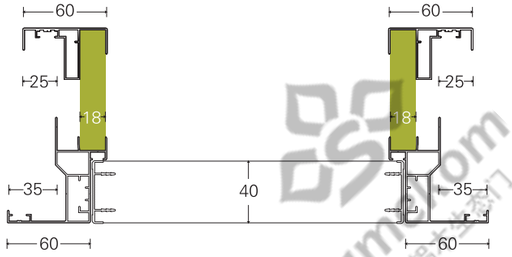

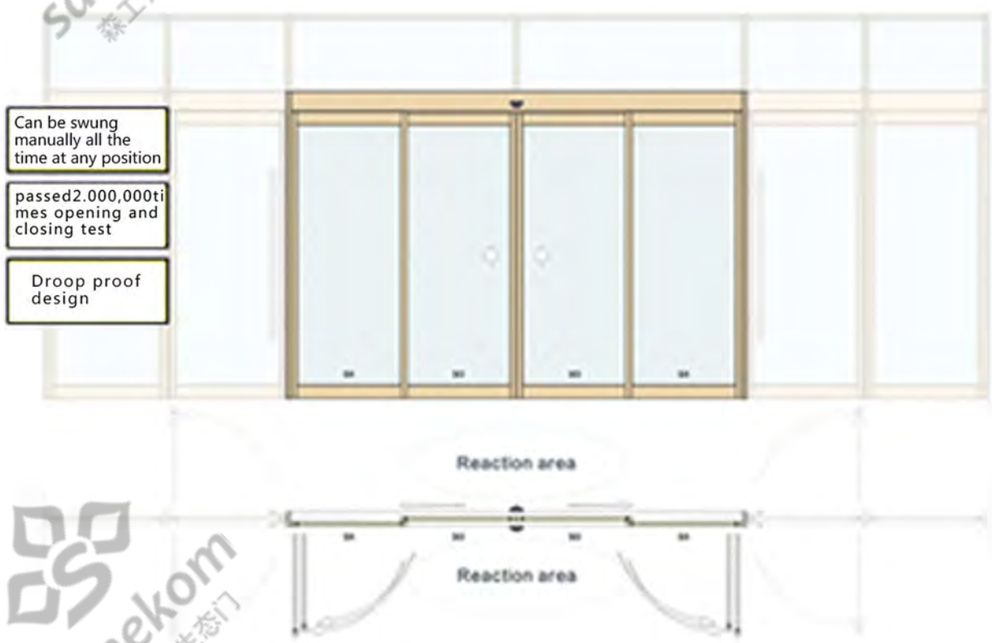

BREAKOUT AUTOMATIC SLIDING DOOR

Features

- Fulfill national fire protection standard (GB50016-2006)
- Fulfill national standard of automatic door (JGT177-2005)
- Passed 2,000,000 times opening and closing test
- Offer entirety solution, two years warranty
- High strength aluminum alloy 6063-T6, the average thickness of more than 3.0mm
- All the panels can be swung manually all the time at any position
- Droop proof design, passed 300,000 times swing test
- High performance integrated controller, built-in Bluetooth, multiple operating modes
- Security linkage, remote control settings
- Optional accessories and door control system
- Thickness of guide up to 12.5mm, width of side column up to 155mm, 55mm Aluminum frame
- Customize a variety of sizes, styles and color
- Fluorocarbon spraying surface treatment
- Excellent hardware accessories, 10mm tempered glass
- Double anti pinch function, rebound resistance function
- Easily installation

Specifications	K3500 Normal width frame		K3800 Wider width frame	
Model	K3500-4232	K3500-5432	K3800-4232	K3800-5432
Power	AC220V, 5A, 600W			
Header size	203mm (Height) × 155mm (Depth)			
Side column size	45 x 155mm			
Glass thickness	8mm, 10mm, 5+6+5 hollow			
Color	customized colors (fluorocarbon spraying surface treatment)			
Threshold	embed (standard) surface mount (optional)			
Middle frame	optional, 80mm			
Lower frame	200mm			
Upper frame	105mm			
Maximum width L	4200mm	5400mm	4200mm	5400mm
Maximum height H	3200mm	3200mm	3200mm	3200mm
Pass height H1	2997mm	2997mm	2997mm	2997mm
Mullion width	55mm	55mm	85mm	85mm
Maximum load	J621system 150kg x 2			
Power	J621 system 186W			
Opening speed	150-780mm/s			
Closing speed	150-450mm/s			
Operation mode	Open, Closed, Automatic, One – way open, Semi open, Semi open one-way			
Pane	Four panels , single slide two panels			
Style and size	Customized style and size			

細節 1：轉角頭

細節 2：吊頭

SPECIFICATION 规格

(1) Toilet partition floor material: the ground should be waterproof, dirt, non-slip granite, height should be lower than other ground 10 --- 20mm, floor drain should be less than about 10mm, to facilitate drainage.

(2) Toilet partition top surface material: top surface by the impact of water vapor, the most easy to mold, heat-resistant material with waterproof better. Generally use colorful acrylic molding and shaping aluminum buckle ceiling, these materials are water-resistant and strong, surface and affixed with an insulating material, the bathroom ceiling ideal wood, standard to 120mm wide and 300mm * 300mm square shaped main surface configured with two empty plates and micro. Acrylic molded ceiling lower prices, but easy to aging; colorful molding Ivkou higher prices, but a variety of colors, durability, is the main material used in modern bathroom ceiling. In addition, the use of aluminum plate or calcium silicate board, which is coated with cement paint, lower prices, waterproof and strong.

SPECIFICATION

Lead lined doors are most commonly used in areas of medical facilities where radiation is present. Samekom can provide doors constructed utilizing various lead thicknesses. Samekom are also able to factory glaze (inc. Radiation glass) vision panel.

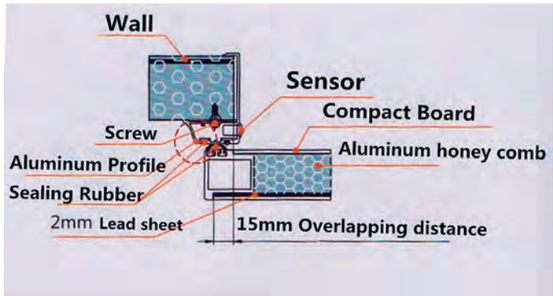

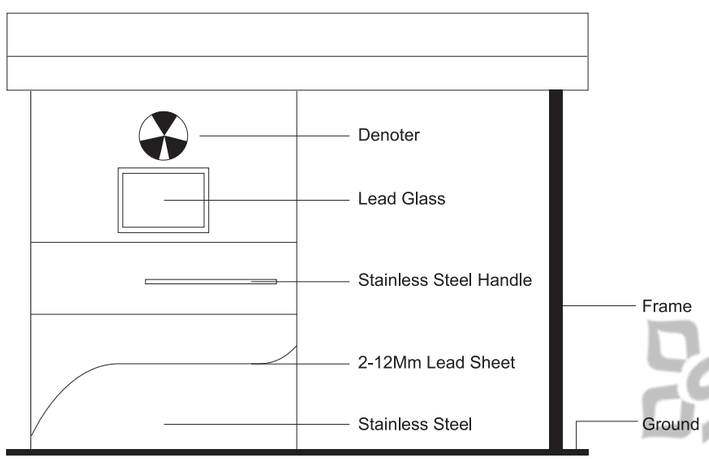

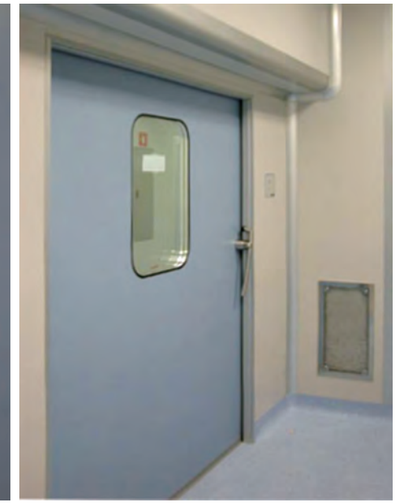

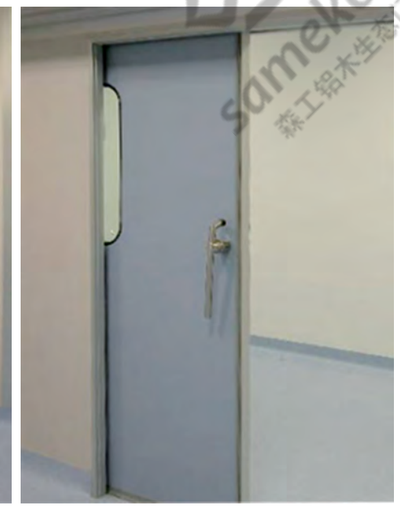

SPECIFICATION

SAMEKOM cleanroom doors can be configured as single/double swing-out or as horizontal sliding either manual, automatic or semiautomatic. SAMEKOM pharmaceutical door panels are assembled with the same panels of the wall system. Swing out doors are designed to fit flush with both sides of the wall panel system and are supplied in several dimensions. The internal framework is constructed of welded extruded aluminum profiles. The external frames are manufactured with rounded anodized or epoxy coated aluminum profiles with air tight dual gaskets. All fasteners for the hinges and latches can be recessed into the door frame. Standard hinges allow doors to swing 180* degrees from full open to full closed position.

Name: 140 Luxury Handrail
Model: XY140- 06
Color: Light Blue
Material: inner- core is aluminium
Cover: PVC coated

Name: 140 Luxury Handrail
Model: XY140- 07
Color: Dark Green
Material: inner- core is aluminium
Cover: PVC coated

安装说明 / Installation Instruction





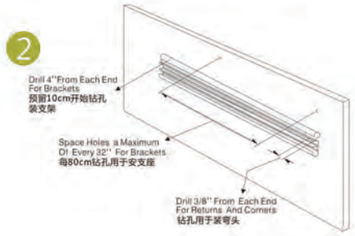



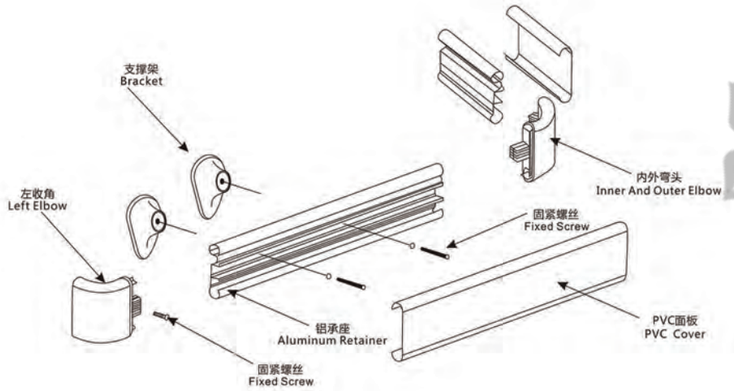

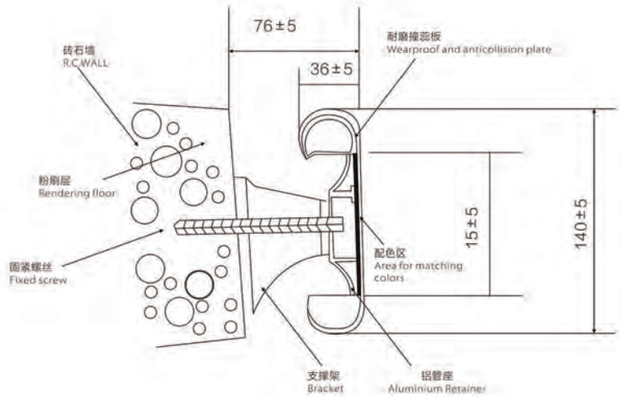

SPECIFICATION

Skirting measurement:

60Mm,80mm,100mm and 120mm height with white,silver,golden,black color etc.

01

02

03

04

05

06

Note: the baseboard 6 cm, 8 cm, 10 cm high selection.



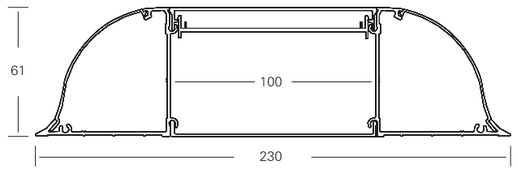

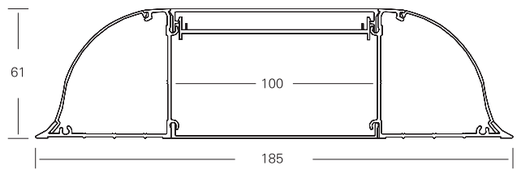

SINGLE DOOR



01



14



15



16

UNEQUAL DOOR



12



17



18

DOUBLE DOOR



11



19



20

HARDWARE

Standard Lock

Exposed Hinges

Hidden Hinges

GMT Floor Hinge

Cylinder

Panicbar

Door Closer

Door Stopper